

CEILING SPEAKER

CS-606F



FEATURES

- Contains a premium grade speaker unit
- Best reliability
- Easy installing and convenience
- Full Range of 1 way speaker system (6.5"unit)

SPECIFICATIONS

Model		CS-606F
Unit		6.5"
Power Handling (AES)		6W
Input Power	100V	6W/3W/1W
	70V	-
Impedance	100V	1.66k Ω (6W)/3.3k Ω (3W)/10k Ω (1W)
	70V	-
	LOW	-
Frequency Range (-20%)		88Hz ~ 17.4kHz
Sensitivity (1W/1m)		85dB
Maximum SPL		93dB
Nominal Dispersion (HxV)	1kHz	180°
	4kHz	60°
Weight (Net)		0.63kg / 1.38lb
Dimensions (Net, WxHxD, mm/in)		230(ϕ) x 100(D)mm / 9(ϕ) x 4(D)in


* Design and specification are subject to be changed for the improvement of product quality without pre notice.

interM



CEILING SPEAKER




FREQUENCY RESPONSE

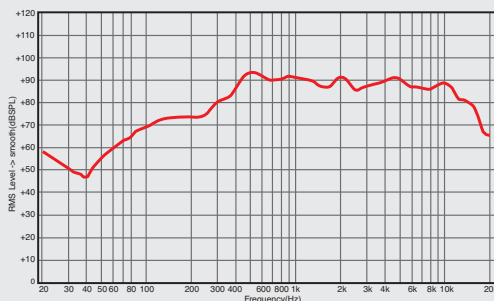


INSERTING SPEAKER INTO CEILING

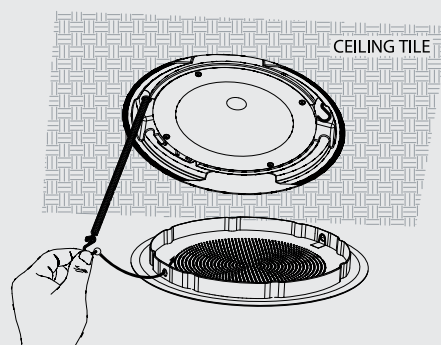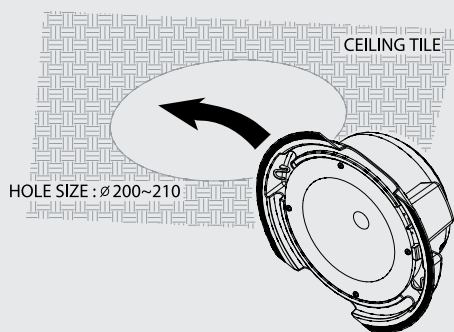

INPUT TERMINAL

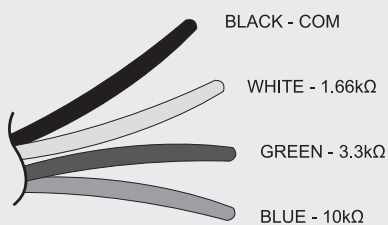

DIMENSIONAL

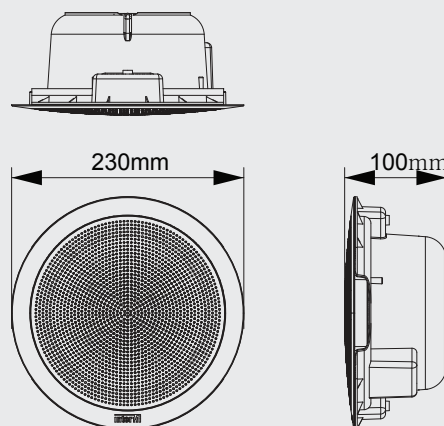

Inter-M Corporation

- Office : 719, DOBONG-RO, DOBONG-GU, SEOUL, KOREA
 - Tel : +82-2-2289-8140~8, Fax : +82-2-2289-8149
 - Home page: <http://www.inter-m.com>, E-mail: overseas@inter-m.com