

CS-620FH/630FH/680FH series speaker is the speaker for playing music using coaxial 2 way driver.


It is the finest solution for the space such as class room, meeting room which needs High-quality sound and high intelligibility.




FEATURES

- **6.5" coaxial 2Way speaker**
- **Using High-quality matching transformer (100V)**
- **Low impedance input terminal**
Provides a connection terminal for low impedance (8 ohm) to play high-quality music.
- **Suitable for music playing**
It is suitable for playing music with a wide band bandwidth ranging from 400Hz~4kHz.
- **Offering an installation bracket**
It ensures an safe installation of speaker by providing High-quality speaker installation tools made up with bracket-ring and bracket-rail.

● Tap switch

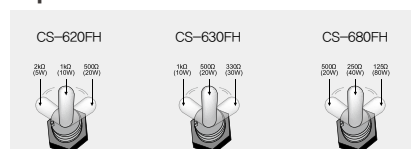

● Connecting the each output cable of speaker



SPECIFICATION



Model		CS-620FH	CS-630FH	CS-680FH
Type		6.5" 2Way Coaxial Ceiling Speaker		
Unit		LF : 6.5", HF : 1"		
Power Handling(AES)		20W	30W	80W
Input Power	100V	20/10/5W	30/20/10W	80/40/20W
	70V	-	-	-
Impedance	100V	500/1k/2kΩ	330/500/1kΩ	125/250/500Ω
	70V	-	-	-
	LOW	8Ω		
Power Selection		Toggle Switch		
Frequency Response (-10dB)		200Hz ~ 20kHz		
Sensitivity (1W/1m 300,400,500,600Hz avg.)		88dB	90dB	88dB
Maximum SPL[Cont]		101dB	105dB	107dB
Norminal Dispersion		130°	70°	130°
Input Connector		3P Euroblock		
Enclosure Material		ABS(V0)		
Enclosure Color(Front)		Light Gray		
Grill Material		Metal Grill		
Grill Color		Light Gray		
Cut-Out Diameter(Ø, mm)		Ø200~205		
Weight (Net)		2kg	2.42kg	3.57kg
Dimensions (Ø(WxH) x D, mm)		Ø230 x 168		
Weather Resistant		IP34		
Flame resistant		O		
Certification		-		
Included Accessories		-		

CS-620FH/630FH/680FH

Ceiling
Speaker


TECHNICAL DATA

DIMENSION

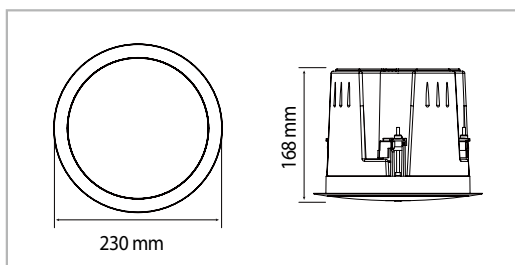


FREQUENCY RANGE


• CS-620FH

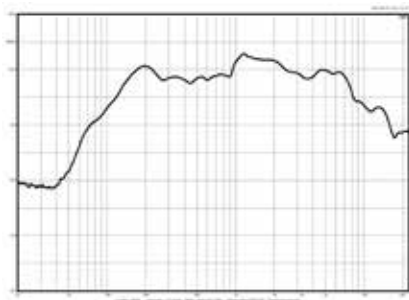

• CS-630FH

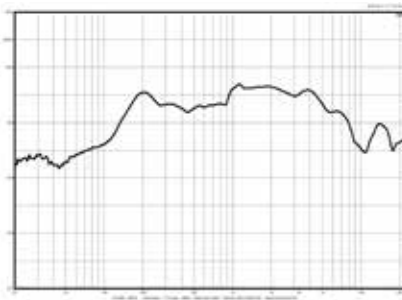


• CS-680FH

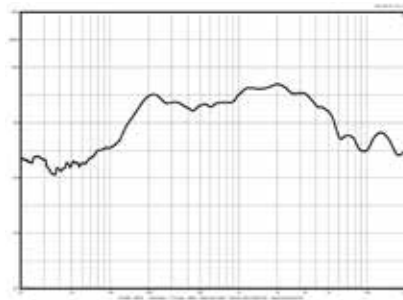


POLAR PATTERN


• CS-620FH




• CS-630FH




• CS-680FH




SPEAKER INSTALLATION GUIDE

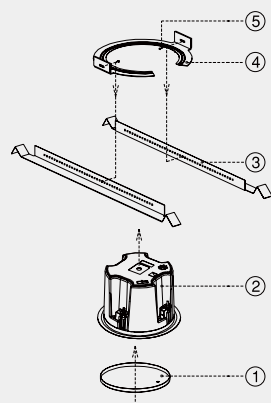

5	SCREW 1WPTC 4 x 12B	2
4	BKT-RING	1
3	BKT-RAIL	2
2	SET	1
1	GRILL COVER	1
NO	NAME	QTY



※ Ceiling Hole Size : $\varnothing 200 \sim \varnothing 205$

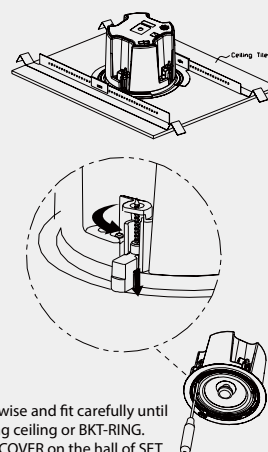

1. Turn clockwise and fit carefully until approaching ceiling or BKT-RING.
2. Put GRILL-COVER on the hall of SET and press to be combined.