


Emergency Panel

EP-6216



Emergency Panel

EP-6216

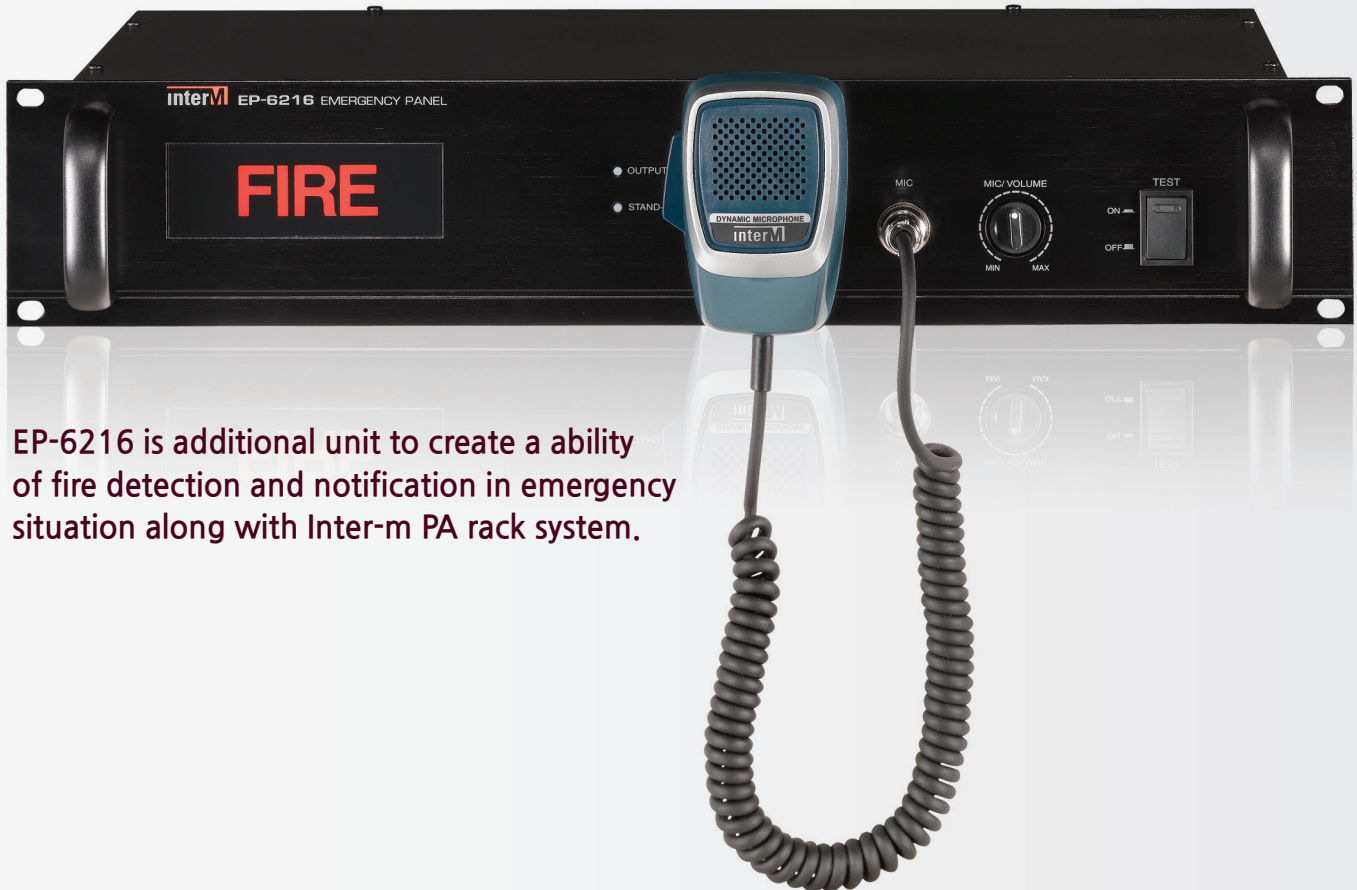

EP-6216 is additional unit to create a ability of fire detection and notification in emergency situation along with Inter-m PA rack system.

- **SOUND NOTIFICATION**

- automatically notify with warning sound (siren or voice) in emergency situation caused by fire.

- **EMERGENCY NOTIFICATION PANEL**

- when a fire occurs, the fire indicator on front panel activates to be realized a emergency situation immediately.

- **PRIORITY BORADCATING**

- Auto-Ann/Timer/Remote/Pre Input are sent to the PRE OUT in order of priority.

- **AUTO ANNOUNCEMENT**

- the announcement can be selected with switch either internal or external sound source during fire alarm operation.

- **DYNAMIC MIC**

- The unit contains a built-in uni-directional dynamic microphone on front panel.

- **TEST SWITCH**

- This switch is used for checking and testing the system.

- **REMOTE MIC**

- additional remote microphone can be attached.

- **DC 24V OUTPUT**

- DC24 output terminal is used for supplying a DC power to related external device.

- **SIREN/MIC VOLUME ADJUSTMENT**

- volume control knob located on front panel adjust a volume of siren and mic.

FRONT/REAR PANEL



- | | |
|-----------------------------------|-------------------------|
| 1 FIRE INDICATOR | 4 TEST SWITCH |
| 2 OUTPUT INDICATOR LED | 5 STANDBY INDICATOR LED |
| 3 MICROPHONE AND BUILT-IN SPEAKER | 6 MIC VOLUME |



- | | |
|----------------------------|---------------------------|
| 1 MATRIX CONNECTOR | 7 PRE-AMP INPUT JACK |
| 2 REMOTE MIC TERMINAL | 8 REMOTE 1, 2 INPUT JACKS |
| 3 REMOTE MIC SWITCH | 9 TIMER INPUT JACK |
| 4 DC 24V OUT TERMINAL | 10 AUTO ANN INPUT JACK |
| 5 AUTO ANN SELECTOR SWITCH | 11 PRE OUT JACK |
| 6 SIREN VOLUME | |


Emergency Panel

EP-6216

SPECIFICATIONS

	EP-6216
Operating Modes	Auto, Test
Emergency Siren Frequency	800Hz (Emergency)
Program Exchange Mode	Businessm, RM1, RM2, Timer
Operation Temperature	-10°C ~ +40°C / 14°F~104°F
Power Source	DC 24V
Power Consumption	4W
Weight (SET)	4kg/8.8lb
Dimensions (SET)	482(W)x88(H)x280(D)mm/19(W)x3.5(H)x11(D)in

※ Specifications and design are subject to change without notice.

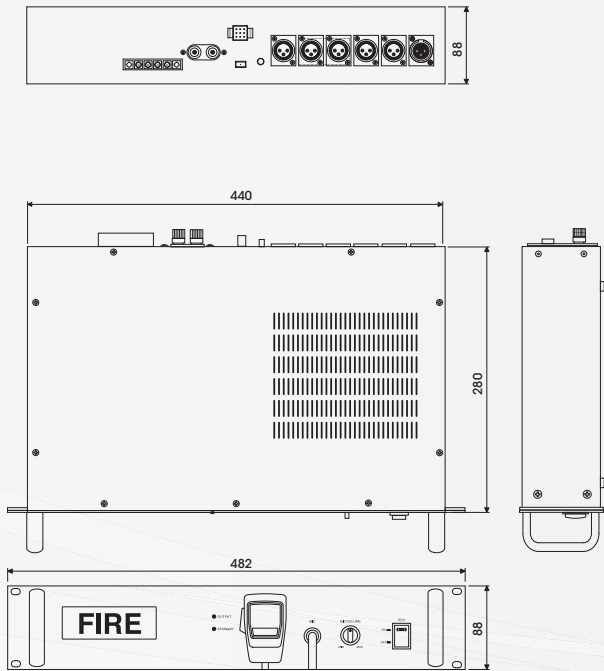



Inter-M Corp. (IMK)

719, Dobong-ro, Dobong-gu, Seoul, Korea
Overseas Sales Team

Tel_ +82-2-2289-8141~7 Fax_ +82-2-2289-8149 E-mail_ overseas@inter-m.com

www.inter-m.com