


MD-710V




interM

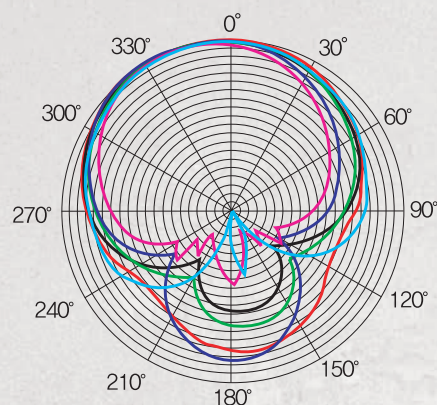

100Hz -78.1dB
500Hz -75.4dB
1000Hz -74.8dB
2000Hz -71.9dB
5000Hz -68dB
10000Hz -64dB

> Features

- Super-cardioid pick-up pattern
- Multi-Angle anti roll Head (MAH)
- Triple layer pop filter
- Shock-mount system cuts down handling noise
- Includes Integrated On/Off Switch
- Frequency response tailored for multi-purpose speech
- Zippered Pouch with Microphone Stand Clip
- Shocks and vibration-resistant metal body

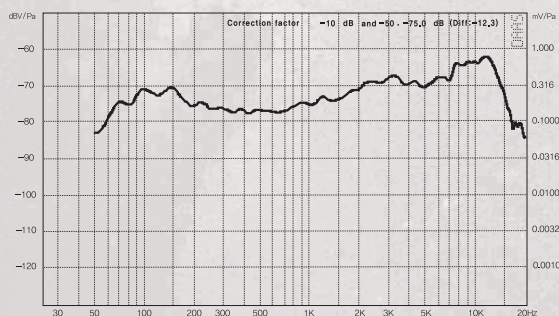

Inter-M Microphone Series

	Type	Polar Pattern	Frequency Response	Sensitivity	Output Impedance	Weight
	Dynamic (Moving Coil)	Hyper Cardioid	70Hz ~ 15kHz	-52dB ± 2dB (0dB=1V/1Pa, 1kHz)	400Ω ± 10% Balanced	250g ± 10g
	Dynamic (Moving Coil)	Hyper Cardioid	75Hz ~ 16kHz	-54dB ± 2dB (0dB=1V/1Pa, 1kHz)	380Ω ± 10% Balanced	265g ± 10g
	Dynamic (Moving Coil)	Super Cardioid	75Hz ~ 18kHz	-53dB ± 2dB (0dB=1V/1Pa, 1kHz)	700Ω ± 30% Balanced	280g ± 10g
	Dynamic (Moving Coil)	Super Cardioid	55Hz ~ 16kHz	-75dB ± 3dB (0dB=1v/uBar at 1kHz)	600Ω ± 30% (at 1 kHz)	250g ± 10g
	Dynamic (Moving Coil)	Super Cardioid	55Hz-16kHz	-75dB ± 3dB (0dB=1v/uBar at 1kHz)	600Ω ± 30% (at 1kHz)	250g ± 10g
	Dynamic (Moving Coil)	Super Cardioid	55Hz-16kHz	-75dB ± 3dB (0dB=1v/uBar at 1kHz)	600Ω ± 30% (at 1kHz)	250g ± 10g
	Dynamic (Moving Coil)	Super Cardioid	50Hz-17kHz	-75dB ± 3dB (0dB=1v/uBar at 1kHz)	600Ω ± 30% (at 1kHz)	250g ± 10g
	Dynamic (Moving Coil)	Super Cardioid	50Hz-17kHz	-73dB ± 3dB (0dB=1v/uBar at 1kHz)	350Ω ± 30% (at 1kHz)	250g ± 10g

interM

www.inter-m.com



Inter-M Corp. (IMK)

719, Dobong-ro, Dobong-gu, Seoul, Korea
Overseas Sales Team

Tel_ +82-2-2289-8141~7 Fax_ +82-2-2289-8149 E-mail_ overseas@inter-m.com

www.inter-m.com

※ Design and specification are subject to be changed for the improvement of product quality without pre notice.

2015. 4. V1