

Condenser Remote Microphone

RMC-02



RMC-02

OVERVIEW

RMC-02 Paging Microphone that consists of unidirectional electronic condenser Microphone and Mic On/Off switch. With the Condenser Microphone, it guarantees high sensitivity and wide frequency range and is designed to use it without power supply due to use of AA battery.

FEATURES



- ⌚ Unidirectional electronic condenser Microphone.
- ⌚ Possible to use it without power supply due to using of AA battery.
- ⌚ Applying of ON/OFF BUMP SOUND inhibit circuit.
- ⌚ This stand made of heavy Zn die-casting which can minimize touch noise.
- ⌚ Applying of balance output circuit for remote installation.

CONSTITUTION & ACCESSORY

- ⌚ Stand of RMC-02 x 1
- ⌚ Microphone of CMC-02 x 1
- ⌚ Wind Screen x 1
- ⌚ AA Battery x 2
- ⌚ Operation manual of RMC-02



POLAR PATTERN & FREQUENCY RESPONSES

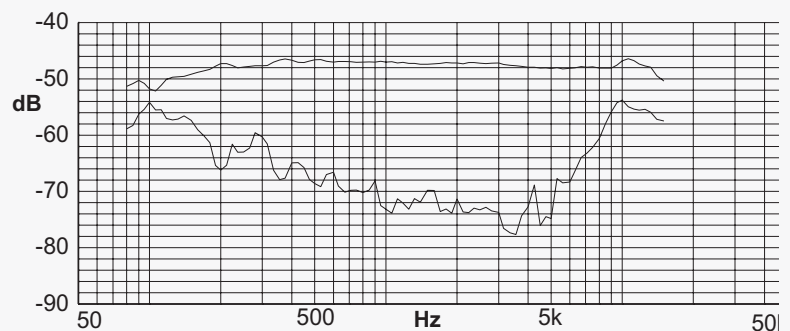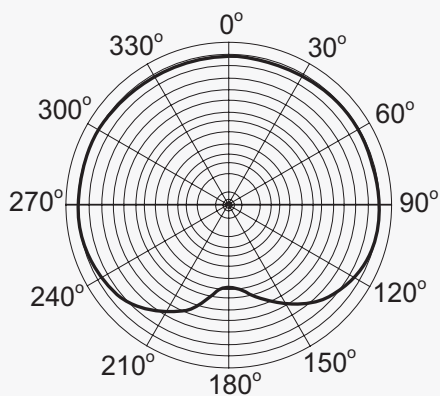

SPECIFICATIONS

		RMC-02
MIC Input Sensitivity		-45dB $\pm$ 3dB (0dB=1V/Pa at 1kHz)
Frequency Response		40Hz $\sim$ 16KHz
Max. SPL		Over 105dB
S/N		65dB
Output Level/Impedance		600 Ω $\pm$ 30%
Gain(Base)		-2dB(Battery), -1.5dB(Phantom)
Weight(SET)		1.6kg
Dimensions(SET)	Base	99(W) x 50(H) x 148(D)mm
	Mic	14.5(W) x 535(H) x 14.5(D)mm



Inter-M Corp. (IMK)

719, Dobong-ro, Dobong-gu, Seoul, Korea
Overseas Sales Team

Tel_ +82-2-2289-8141~7 Fax_ +82-2-2289-8149 E-mail_ overseas@inter-m.com

www.inter-m.com

※ Design and specification are subject to be changed for the improvement of product quality without pre notice.

2015. 7. V1